


NUMBER

C-380310

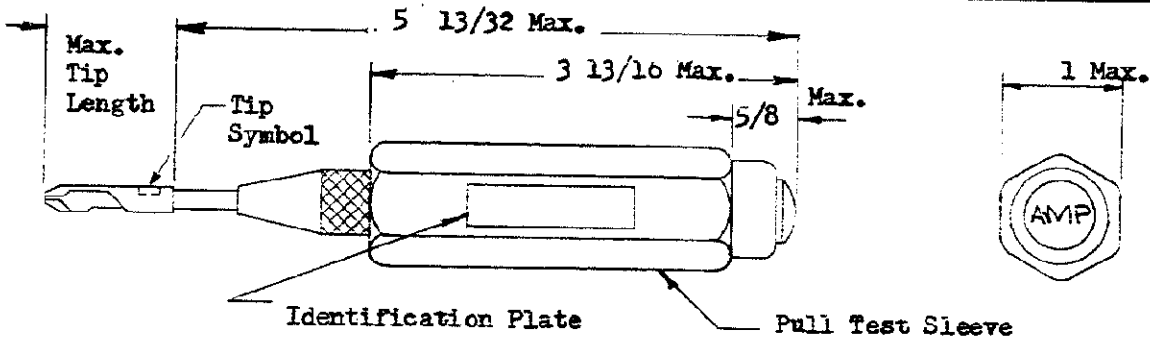

Tool Number	Trip Force	Tip Number	Tip Symbol	Tip Length
* 380310-1	20-22	395005	F	25/32
380310-2	12-13	395005	F	25/32
380310-3	12-13	395042	G	1 5/32
* 380310-4	20-22	395042	G	1 5/32
* 380310-7	20-22	380301-1	A1	1 23/32
380310-8	16-18	380301-1	A1	1 23/32
380310-9	12-13	126042-1	S1	1

* 20-22 pound tool to be used exclusively for inserting terminals into receptacles mounted in resilient material.

APPLICATION TOOLING ENGR'G.
CONNECTOR PRODUCTS DIV.

1. For tool usage, see Instruction Sheet # 7076.
2. For Tip dimensions, see Tip Customer Drawing.
3. For readjustment or replacement of parts other than tips, return Tool to AMP, Inc., Mt. Joy, Penna. to insure proper calibration.
4. Trip force is the force in pounds, required to trip tool.
5. A force of 10-12 pounds is required to make the Pull Test Sleeve move .100 inches.

DIMENSIONS IN INCHES. DO NOT SCALE PRINT.

©1956 BY AMP INCORPORATED. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.

**CUSTOMER COPY
REFERENCE ONLY**

MATERIAL AND FINISH

Steel-Plated;
Aluminum
Weight 6 ± 1 1/2 Oz.



AMP INCORPORATED
HARRISBURG, PENNA.

WIRE — RANGE — INSULATION

TYPE

TOLERANCE EXCEPT AS NOTED ± .015 ± 1° 0'

SCALE

LOC

NO

M A

C-380310

REV

J-3

NAME TOOL-STANDARD CERTI-LOK

INSERTION WITH PULL TEST FEATURE

PRINT DIST J-3