



REV	BY	DATE	ECN/ERO	DESCRIPTION
00	Jinlong	09/16/17	-	Production release

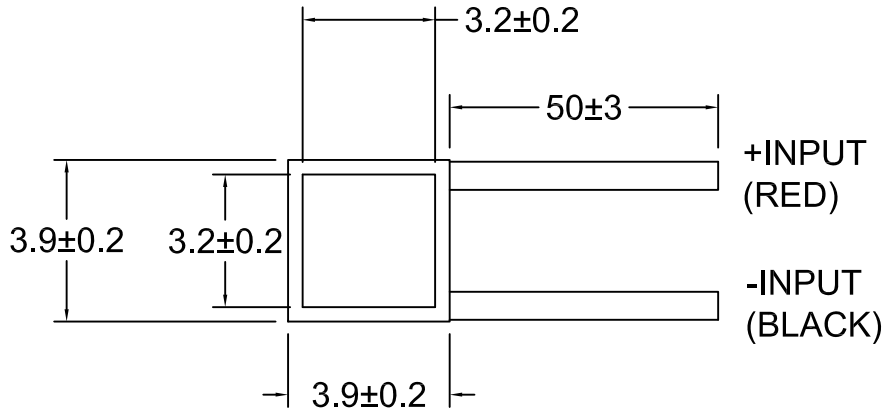

NOTES:

1. Use 5%Sb,95%Sn for solder.
2. Wire are UL1213, AWG28,7/36,PTFE.
3. Lapped both side, height is 4.20±0.20mm, flatness and parallel is 0.05mm.
4. ACR range @23°C: 0.522-0.580-0.638 ohm

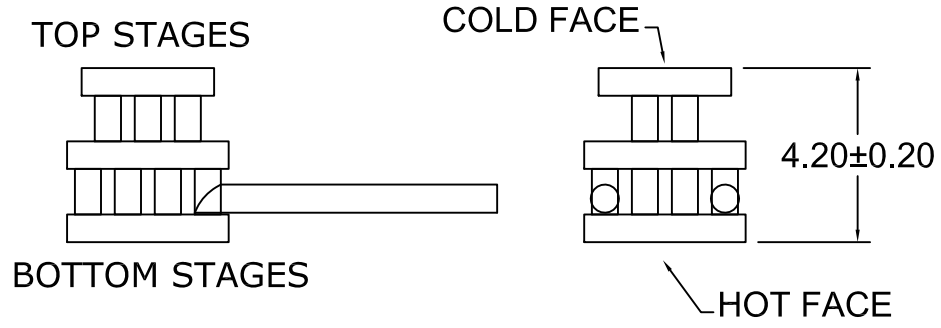

REFERENCE ONLY!	
Nominal Specs (@25°C)	
I _{max} (A)	1.4
U _{max} (V)	0.8
Q _{max} (W)	0.36
ΔT _{max} (°C)	87

NOTE:
ALL DIMENSIONS = mm

<p>4707 Detroit Ave Cleveland, OH 44102</p> <p>Ph.(216) 939-2300 Fax(216) 939-2310</p>		P/N	DESCRIPTION	
		387001820	MS2,010,06,06,11,11,11,W2,ET	
<p>SURFACE FINISH 3.2 √μm 125 √μin (UNLESS OTHERWISE SPECIFIED)</p> <p>BREAK ALL EDGES; 0.015 [0.40mm] x 45°</p>		TITLE		
		STANDARD 2-STAGE CASCADE CATALOG		
		232° SbSn CONSTRUCTION		
NAME DATE		DWG NO	REV	
DRAWN BY: Jinlong 09/16/17		387001820	00	
INITIATED BY				
APPROVAL				