

**PRODUCT BRIEF:**

Logic PD :: Marvell


## PXA270 CARD ENGINE **System on Module**

**The PXA270 Card Engine is a compact, product-ready hardware and software solution that fast forwards your embedded product design.**

The PXA270 Card Engine is a complete System on Module (SOM) that offers essential features for handheld and embedded networking applications. Use of custom baseboards makes the Card Engine the ideal foundation for OEMs developing handheld and compact products. The Card Engine provides a common reference pin-out on its expansion connectors, which enables easy scalability to next generation microprocessor Card Engines when new functionality or performance is required.

Application development is performed right on the product-ready PXA270 Card Engine and software Board Support Packages (BSPs), which enables you to seamlessly transfer your application code and hardware into production.

The PXA270 Card Engine is ideal for applications in the medical, point-of-sale, industrial, and security markets. From patient

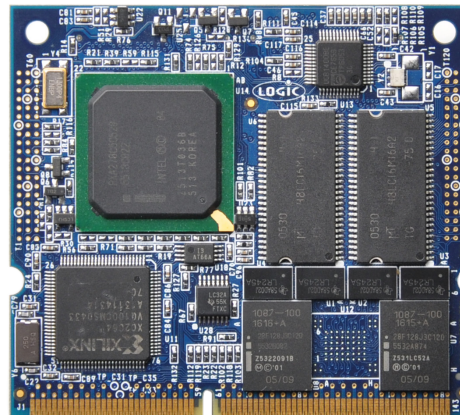

**PXA270 CARD ENGINE**

monitoring and medical imaging, to card payment terminals and bar code readers, to CCTV cameras and intruder alarms, the PXA270 Card Engine allows for powerful versatility and long-life products.


**PXA270 CARD ENGINE :: HIGHLIGHTS:**

- + Product-ready System on Module with the Marvell PXA270 Applications Processor running at 416 or 520 MHz
- + Compact form factor 60.2 mm x 67.8 mm x 4.4 mm
- + Long product lifecycle
- + 0 °C to 70 °C (commercial temp) or -25 °C to 85 °C (extended temp)
- + RoHS compliant

**PXA270 ZOOM™ SDK :: FEATURES:**

- + Application baseboard
- + PXA270 Card Engine (CENGPXA270-520-10-504HCR)
- + Necessary accessories to immediately get up and running
- + Kit available from Logic PD (SDK-PXA270-520-10-6432R)
- + See Zoom™ SDK product brief for more information

## PXA270 Card Engine Block Diagram

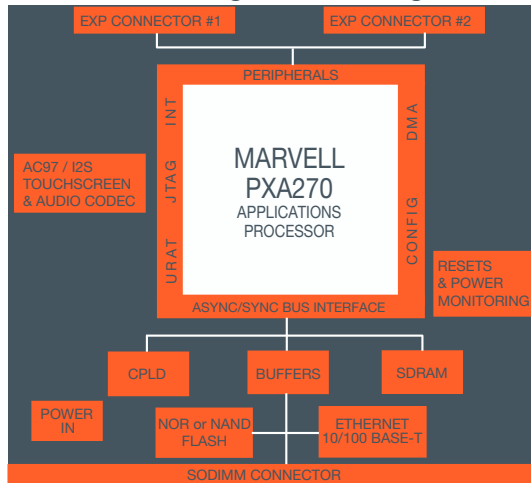

## PXA270 Card Engine Ordering Information

Logic PD Model Number	Speed (MHz)	SDRAM (MB)	NAND Flash (MB)	NOR Flash (MB)	Touch	Audio	Ethernet	Temp (°C)
CENGPXA270-416-11-505EXR	416	64	0	64	Y	Y	–	-25 – 85
CENGPXA270-416-11-505HXR	416	64	0	64	Y	Y	Y	-25 – 85
CENGPXA270-520-11-504HCR	520	64	0	32	Y	Y	Y	0 – 70

## PXA270 ZOOM™ SDK Ordering Information<sup>1</sup>

Logic PD Model Number	SOM Configuration	Recommended Resale
SDK-PXA270-520-10-6432R	CENGPXA270-520-10-504HCR	\$499

1. The SDK contains a PXA270-10 Card Engine; quantities are limited.

### LOGIC PD WEBSITE :: DESIGN RESOURCES:

- + Logic PD Products : [www.logicpd.com/products](http://www.logicpd.com/products)
- + Logic PD Technical Support : [www.logicpd.com/product-support](http://www.logicpd.com/product-support)
- + For more information contact Logic PD Sales : [product.sales@logicpd.com](mailto:product.sales@logicpd.com)



411 N. Washington Ave. Suite 400 Minneapolis, MN 55401  
T : 612.672.9495 F : 612.672.9489 I : [www.logicpd.com](http://www.logicpd.com)



© 2011 Logic Product Development Company. All rights reserved.

## Product Features

### Processor

- + Marvell PXA270 Applications Processor running at 416 or 520 MHz

### SDRAM Memory

- + 64 MB SDRAM standard

### Flash Memory

- + 32 or 64 MB NOR standard

### Display

- + Programmable color LCD controller
- + Built-in driver supports up to 800x600 with 16-bit LCD interface

### Touch Screen

- + Integrated 4-wire touch screen controller

### Network Support

- + 10/100 Base-T Ethernet controller for application/debug (SMSC LAN 91C111)

### Audio

- + AC97 audio codec

### PC Card Expansion

- + CompactFlash Type I card (memory-mapped mode only)
- + Smart Card, MMC/SD, dual PCMCIA interfaces

### USB

- + USB 2.0 full-speed host and device interface

### Serial Ports

- + Three 16C550 compatible UARTs, two I2C

### IrDA

- + SIR supports up to 115.2 Kbps, multiplexed IrDA/Bluetooth

### GPIO

- + Programmable I/O depending on peripheral requirements

### Software

- + LogicLoader™ (bootloader/monitor)
- + Windows Embedded CE 5.0 BSP

### Mechanical

- + 60.2 mm wide x 67.8 mm long x 4.4 mm high

### RoHS Compliant

PN: 1001781 Rev E