

3:1 Mux/DeMux Bus Switch


Features

- · Near-Zero propagation delay
- 5-ohm switches connect inputs to outputs
- · Direct bus connection when switches are ON
- Ultra Low Quiescent Power (0.2μA typical)– Ideally suited for notebook applications
- Packaging (Pb-free & Green available):
 - 8 pin 118-mil wide plastic MSOP (U)


Description

Pericom Semiconductor's PI5C3309 is a 3:1 Multiplexer/Demultiplexerwith 3-State outputs. Inputs can be connected to outputs with lowOn-Resistance (5-ohm) with no additional ground bounce noise orpropagation delay.

Logic Block Diagram



Product Pin Configuration

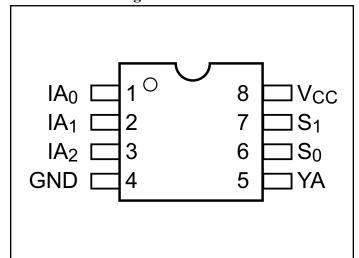

Truth Table (1)

Select			
S1	S0	YA	Function
L	L	IA0	S1-0 = 0
L	Н	IA1	S1-0 = 1
Н	L	IA2	S1-0=2
Н	Н	Hi-Z	S1-0=3

Note:

1. H = High Voltage Level L = Low Voltage Level

Pin Description

Pin Name	Description	
IAn	Data Inputs	
S0-1	Select Inputs	
YA	Data Output	
GND	Ground	
V_{CC}	Power	

12-0242 1 www.pericom.com P-0.1 08/03/12



Maximum Ratings

(Above which the useful life may be impaired. For user guidelines, not tested.)

Storage Temperature65°C to +150°C
Ambient Temperature with Power Applied40°C to +85°C
Supply Voltage to Ground Potential (Inputs & V _{CC} only) –0.5V to +7.0V
Supply Voltage to Ground Potential (Outputs & D/O only) -0.5V to +7.0V
DC Input Voltage0.5V to +7.0V
DC Output Current
Power Dissipation

Note:

Stresses greater than those listed under MAXIMUM RAT-INGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

DC Electrical Characteristics (Over Operating Range, $T_A = -40$ °C to +85°C, $V_{CC} = 5V \pm 5\%$)

Parameters	Description	Test Conditions ⁽¹⁾	Min.	Typ. ⁽²⁾	Max.	Units
V_{IH}	Input HIGH Voltage	Guaranteed logic HIGH level	2.0			V
$V_{ m IL}$	Input LOW Voltage	Guaranteed logic LOW level	-0.5		0.8	v
I_{IH}	Input HIGH Current	$V_{CC} = Max., V_{IN} = V_{CC}$			±1	
$I_{ m IL}$	Input LOW Current	$V_{CC} = Max., V_{IN} = GND$			±1	μΑ
I_{OZH}	High Impedance Output Current	$0 \le I_N, Y_N \le V_{CC}$			±1	
V_{IK}	Clamp Diode Voltage	$V_{CC} = Min, I_{IN} = -18mA$	-0.7		1.2	V
Ios	Short Circuit current	$I(Y)=0V, Y(I)=V_{CC}$			100	mA
V_{H}	Input Hysteresis at Control Pins			150		mV
R _{ON}	Switch on Resistance ⁽⁴⁾	$V_{CC} = Min., V_{IN} = 0.0V, I_{ON} = 48mA$		5	7	Ω
	Switch on Resistance	$V_{CC} = Min., V_{IN} = 2.4V, I_{ON} = 15mA$		10	15] 12

Notes:

- 1. For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device type.
- 2. Typical values are at $V_{CC} = 5.0V$, $T_A = 25^{\circ}C$ ambient and maximum loading.
- 3. Not more than one output should be shorted at one time. Duration of the test should not exceed one second.
- 4. Measured by the voltage drop between I and Y pin at indicated current through the switch. On-Resistance is determined by the lower of the voltages on the two (I, Y) pins.

Capacitance $(T_A = 25^{\circ}C, f = 1 \text{ MHz})$

Parameters ⁽¹⁾	Description	Test Conditions	Тур.	Units
C_{IN}	Input Capacitance		3	
$C_{ m OFF}$	I _A Capacitance, Switch Off	$V_{IN} = 0V$	4	pF
C _{ON}	I _A Capacitance, Switch On		16	

Notes:

1. This parameter is determined by device characterization but is not production tested.



Power Supply Characteristics

Parameters	Description	Test Conditions ⁽¹⁾		Min.	Typ. ⁽²⁾	Max.	Units
I_{CC}	Quiescent Power Supply Current	V	$V_{IN} = GND \text{ or } V_{CC}$		0.1	3.0	μА
ΔI_{CC}	Supply Current per Input @ TTL HIGH	$V_{CC} = Max.$	$V_{IN} = 3.4V^{(3)}$			2.5	mA
I_{CCD}	Supply Current per Input per MHz ⁽⁴⁾	V _{CC} = Max., I and Y pins open Control Input Tog- gling 50% Duty Cycle				0.25	mA/ MHz

Notes:

- For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device.
- 2. Typical values are at $V_{CC} = 5.0V$, $+25^{\circ}C$ ambient.
- 3. Per TTL driven input ($V_{IN} = 3.4V$, control inputs only); I and Y pins do not contribute to I_{CC}.
- 4. This current applies to the control inputs only and represent the current required to switch internal capacitance at the specified frequency. The I and Y inputs generate no significant AC or DC currents as they transition. The parameter is not tested, but is guaranteed by design.


Switching Characteristics over Operating Range

			PI5C	C3309	
Parameters	Description	Conditions	Com		TT*4
			Min.	Max.	Units
t _{IY}	Propogation Delay ^(1,2) I _N to Y _N			0.25	
t_{SY}	Bus Select Time S_N to Y_N		0.5	6.6	
t _{PZH} t _{PZL}	Bus Enable Time S_N to Y_N	$C_{L} = 50 pF$ $R_{L} = 500 \Omega$	0.5	6.0	ns
t _{PHZ} t _{PLZ}	Bus Disable Time S_N to Y_N	7 NL 30032	0.5	6.0	

Notes:

- 1. This parameter is guaranteed but not tested on Propagation Delays.
- 2. The bus switch contributes no propagational delay other than the RC delay of the On-Resistance of the switch and the load capacitance. The time constant for the switch alone is of the order of 0.25ns for 50pF load. Since this time constant is much smaller than the rise/fall times of typical driving signals, it adds very little propagational delay to the system. Propagational delay of the bus switch when used in a system is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.



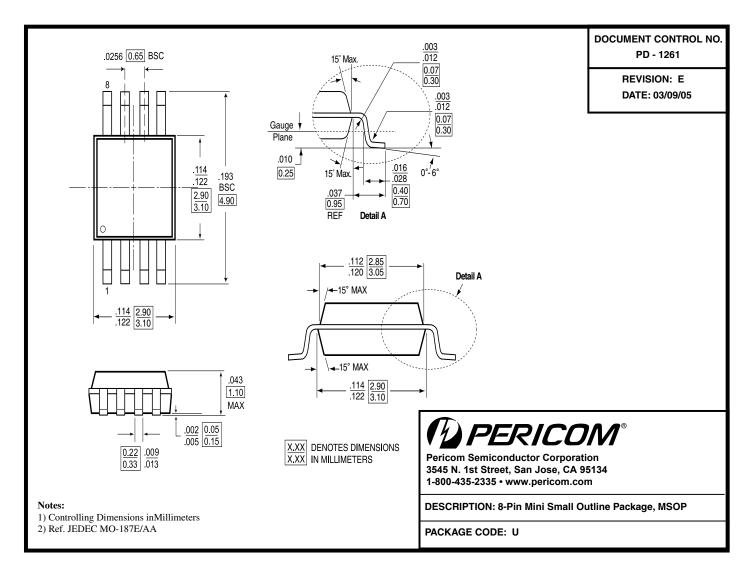

Note:

 $\bullet \quad \text{For latest package info, please check: } \\ \text{http://www.pericom.com/products/packaging/mechanicals.php} \\$

Ordering Information

Ordering Code	Packaging Code	Package Description
PI5C3309UEX	U	Pb-free & Green, 8-pin MSOP

Notes:

- Thermal characteristics can be found on the company web site at www.pericom.com/packaging/
- E = Pb-free & Green
- Adding an X suffix = Tape/Reel

Pericom Semiconductor Corporation • 1-800-435-2336 • www.pericom.com